

## PRINTER TYPE

<b>Printing Technology</b>	Laser Single Pass
<b>Engine Resolution</b>	600 x 600dpi
<b>Resolution Enhancement</b>	EPSON AcuLaser Colour 2400dpi RIT
<b>Print Speed</b>	Up to 24ppm in Colour & Monochrome (A4) Up to 13ppm in Colour & Monochrome (A3)
<b>First Page Out</b>	10.5sec in Monochrome & 12sec in Colour (A4)
<b>Processor</b>	PowerPC 600MHz
<b>Maximum Monthly Volume</b>	80,000 pages

## FONT

<b>ESC/Page-Colour Mode</b>	84 scalable + 7 bitmap
<b>LJ4(PCL) Mode</b>	93scalable + 7 bitmap
<b>ESC/P2 Mode</b>	10 typefaces
<b>FX Mode</b>	8 typefaces
<b>IBM Mode</b>	8 typefaces

## PAPER HANDLING

<b>Standard Paper Input</b>	650 sheets (150 MultiPurpose tray + 500-Sheet Paper Cassette)
<b>Multi-purpose tray</b>	Capacity: 150 sheets Paper size: A3, A4, A5, B4, B5, LT, HLT, EXE, GLT, GLG, LGL, B, Monarch, Com#10, DL, C6, IB5, F4 Width: 90.0 to 304.8mm Length: 98.0 to 1200.0mm
<b>Standard Paper cassette(Universal)</b>	Capacity: 500 sheets Paper size: A3, A4, B5, B4, A5, LT, LGL, GLG, B
<b>500-Sheet Paper Cassette Unit A3 (OPTION)</b>	Capacity: 500 sheets Paper size: A3, A4, B5, B4, LT, LGL, GLG, B
<b>1500-Sheet Paper Cassette Unit A3 (OPTION)</b>	Capacity: 1500 sheets Paper size: A3, A4, B5, B4, LT, LGL, GLG, B
<b>Paper weight</b>	60 - 216 g/m <sup>2</sup>
<b>Optional Paper Handling</b>	Up to 3 x 500-Sheet Paper Cassettes Duplex Unit Face-up Tray
<b>Maximum Paper Input</b>	2150 sheets (150 MP tray + 4 x 500-Sheet Paper Cassettes)
<b>Standard Paper Output</b>	500 sheets
<b>Maximum Paper Output</b>	650 sheets

## INTERFACES

IEEE 1284 parallel interface (compatibility, Nibble and ECP mode)  
HighSpeed USB (2.0 compatible)  
10/100 Base Tx ethernet interface  
Type-B I/F

## MEMORY

**Standard / maximum** 128MB with EPSON MiTech - 1024MB max

## POWER REQUIREMENTS

<b>Rated Current</b>	Less than 5/12A (230V/120V)
<b>Power Consumption</b>	Operating: Max. 1064/1095 Wh (230V/120V) Ave. 383/364 Wh (230V/120V) Standby: Ave. 84/80 Wh (230V/120V) Sleep: up to 11 Wh/ 12Wh (230V/120V)

## ENVIRONMENTAL CONDITIONS

<b>Temperature</b>	10 - 32°C
<b>Humidity</b>	15-85%
<b>Sound Power</b>	6.3B (A)
<b>Sound Pressure</b>	51dB (A)

## DIMENSIONS

<b>Width x Depth x Height</b>	678 x 631 x 473 mm
<b>Weight</b>	59kg

## PRINTER DRIVER/UTILITY

<b>Printer Driver for</b>	Microsoft® Windows® 95/98/ME/2000/XP/Server2003, Windows NT™ version 4.0, Mac™ OS 9.X and Mac™ OS X
<b>EPSON Status Monitor 3 for</b>	Microsoft® Windows® 95/98/ME/2000/XP/Server2003, Windows NT™ version 4.0, Mac™ OS 9.x and Mac™ OS X
<b>EPSON Font Manager for</b>	Microsoft® Windows® 95/98/ ME/2000/XP/Server2003, Windows NT™ version 4.0
<b>EPSON Printer Port for</b>	Microsoft® Windows® 2000/XP/Server2003
<b>EPSON Bar Code fonts for</b>	Microsoft® Windows® 95/98/ ME/2000/XP/Server2003, Windows NT™ version 4.0
<b>EpsonNet Config for</b>	Microsoft® Windows® 95/98/ ME/2000/XP/Server2003, Windows NT™ version 4.0, Mac™ OS 9.x and Mac™ OS X
<b>EpsonNet WebManager for</b>	Microsoft® Windows® 98/ ME/2000/XP/Server2003, Windows NT™ version 4.0
<b>EpsonNet Direct Print for</b>	Microsoft® Windows® 95/98/ ME/2000/XP/Server2003, Windows NT™ version 4.0
<b>EpsonNet Internet Print for</b>	Microsoft® Windows® 95/98, Windows NT™ version 4.0
<b>EpsonNet NDSP Gateway for</b>	Microsoft® Windows® 95/98/Me/2000, Windows NT™ version 4.0/ Novell® NetWare® 5.0/5.1/6.0

## PRINTER CONTROL LANGUAGE EMULATIONS

<b>Standard</b>	ESC/Page™ Color, ESC/Page, PCL5e, EPSON GL/2, ESC/P2™, FX, IBM Mode I239X
<b>Optional</b>	Adobe PostScript 3, PCL5c

## CONTROL PANEL

1-line, 20-character LCD display with 3 LEDs & 6 switches


## OPTIONS

Duplex Unit C12C802132
500-sheet Paper Cassette Unit A3 C12C802142
1500-sheet Paper Cassette Unit A3 C12C802152
Face-up Tray C12C802162
Hard Disk Drive C12C824172
Adobe PostScript 3 Kit C12C832622
P5C Emulation Kit C12C832621

## CONSUMABLES

<b>Toner Cartridge (Black)</b>	Lifespan: 15,000 pages (continuous printing @ 5% coverage)	0198
<b>Toner Cartridge (Cyan)</b>	Lifespan: 12,000 pages (continuous printing @ 5% coverage)	0197
<b>Toner Cartridge (Magenta)</b>	Lifespan: 12,000 pages (continuous printing @ 5% coverage)	0196
<b>Toner Cartridge (Yellow)</b>	Lifespan: 12,000 pages (continuous printing @ 5% coverage)	0195
<b>Photoconductor Unit</b>	Lifespan: 30,000 pages (continuous printing @ 5% coverage)	1105
<b>Waste Toner Collector</b>	Lifespan: 24,000 pages (continuous A4 size printing @ 5% coverage)	0194

## COLOUR LASER PRINTER EPSON AcuLaser™ C9100

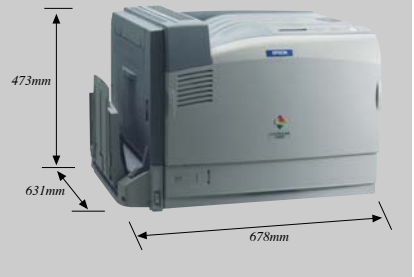

"EPSON ESC/P2 stands for EPSON standard code for printers Level 2. This second generation printer control language supports scalable fonts as well as enhanced graphics capability. It also provides complete backwards compatibility with EPSON's ESC/P, the standard printer language for dot matrix printing." EPSON is a registered trademark of SEIKO EPSON CORPORATION. EPSON ESC/P2 is a trademark of SEIKO EPSON CORPORATION. PostScript is a trademark of Adobe Systems Incorporated or its subsidiaries and may be registered in certain jurisdictions. All other product names and other company names used herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners. EPSON disclaims any and all rights for those marks. Specifications are subject to change without notice.

# EPSON

For enquiries, contact your nearest EPSON sales representatives :

INDIA - (91) 80-305 15000, CALCUTTA - 287 1355/56, CHENNAI - 820 3941/42, MUMBAI - 825 7286, NEW DELHI - 644 7201/2/3  
INDONESIA - (62) 21-572 3161 MALAYSIA - (60) 03-562-88288 PHILIPPINES - (632) 813-6567  
SINGAPORE - (65) 6337 7911, (65) 6586 3111 THAILAND/INDOCHINA - (66) 2670 0680



EPSON AcuLaser.

[www.epson.com.sg](http://www.epson.com.sg)